


AMENDMENTS TO THE CLAIMS:

This listing of claims will replace all prior versions and listings of claims in the application:

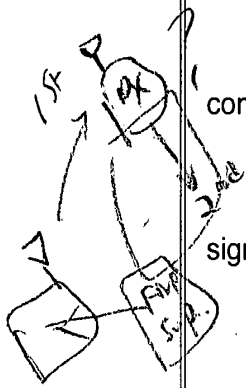

1. (Previously Presented) A system for detecting and suppressing a fire condition in a storage unit for storing freight in a storage area, the system comprising:
a transmitter associated with the storage unit and configured to transmit a first signal upon detection of the fire condition;
at least one receiver configured to detect the first signal and configured to provide a second signal indicating detection of the fire condition; and
a fire suppression device configured to discharge a fire suppressant material into the storage unit upon detection of the fire condition.

2d
cont.

2. (Original) A system according to claim 1, wherein there are a plurality of storage units, a plurality of transmitters, and a plurality of receivers, and wherein an individual transmitter and an individual receiver are associated with each of the plurality of storage units.

3. (Previously Presented) A system according to claim 2, wherein each of the storage units is located at a predetermined position relative to the individual receiver associated with the storage unit.

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

4. (Original) A system according to claim 3, wherein the second signal from a receiver is provided to a control panel that in response to the second signal identifies the storage unit experiencing the fire condition.

5. (Original) A system according to claim 2, wherein at least some of the storage units are containers.

6. (Previously Presented) A system according to claim 2, wherein at least some of the storage units are pallets including blankets for storing the freight.

7. (Original) A system according to claim 1, wherein the fire suppression device comprises a pressurized vessel located within the storage unit, the vessel containing the fire suppressant material within the vessel; and

a fire detection component that activates the discharge of the fire suppressant material into the storage unit upon detection of a fire condition.

8. (Original) A system according to claim 1, wherein the first signal is an infrared signal.

9. (Original) A system according to claim 1, wherein the transmitter includes a bimetallic switch configured to close upon detection of the fire condition.

Pl
cont.

10. (Original) A system according to claim 9, wherein the bimetallic switch is in contact with a surface of the storage unit.

11. (Original) A system according to claim 9, wherein the bimetallic switch extends through a surface of the storage unit.

12. (Original) A system according to claim 11, wherein the surface is a cover for the storage unit.

13. (Original) A system according to claim 11, wherein the surface is a fire resistant blanket.

14. (Original) A system according to claim 2, where the fire suppression device includes a source of pressurized fire suppressant material and a popup device disposed between one of the storage units and the source, the popup device being configured to apply the fire suppressant material to the storage unit upon detection of the fire condition.

15. (Original) A system according to claim 14, wherein a storage unit is a container with a base including a hole, and the popup device includes a valve aligned with the hole, such that the fire suppressant material is discharged into the container through the hole in the base.

B1
cont.

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

16. (Original) A system according to claim 14, further comprising a control unit configured to detect the second signal and transmit an activation signal to the popup device upon detecting the second signal.

17. (Original) A system according to claim 16, further comprising a control panel having a warning indicator, wherein the control unit transmits an alert signal to the warning indicator on the panel.

18. (Currently Amended) A fire suppression and indication system for use in an aircraft, the aircraft having a cockpit, a control panel in the cockpit, and a storage area, the system comprising:

a plurality of storage units for storing freight, the storage units being located at predetermined positions in the storage area;

a transmitter associated with each storage unit and configured to transmit a first signal upon detection of [[the]] a fire condition;

at least one receiver configured to detect the first signal and configured to provide a second signal indicating detection of the fire condition; and

a fire suppression device configured to discharge a fire suppressant material into the storage unit upon detection of the fire condition.

19. (Previously Presented) A system according to claim 18, wherein the fire suppression device includes a source of pressurized fire suppressant material and an application mechanism associated with one of the predetermined positions, the

pl
cont.

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

application mechanism being arranged between one of the storage units and the source and configured to apply the fire suppression device to the storage unit upon detection of the fire condition.

20. (Original) A system according to claim 19, wherein at least one of the storage unit is a container with a base including a hole, and the application mechanism includes a valve aligned with the hole, such that the fire suppressant material is discharged into the container through the hole in the base.

21. (Original) A system according to claim 20, wherein the valve is in a retracted position prior to detection of the fire condition, and the valve is configured to engage the base of the container upon detection of the fire condition.

22. (Original) A system according to claim 21, wherein the application mechanism includes a piston to move the valve into contact with the base.

23. (Currently Amended) A system according to claim 18, wherein at least one of the storage units is a pallet including a fire resistant blanket, and wherein the fire suppression device is arranged below the fire resistant blanket.

24. (Currently Amended) A system according to claim 18, further comprising a control unit configured to receive the second signal, wherein [[and]] the control unit is configured to determine the origin of the first signal based on the second signal.

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

25. (Original) A system according to claim 24, wherein the control unit transmits a third signal to a control panel indicating the origin of the first signal.

26. (Previously Presented) A system according to claim 25, wherein the control unit transmits a fourth signal to the fire suppression device to discharge the fire suppressant material into the storage unit.

27. (Original) A system according to claim 18, wherein the first signal is an infrared signal.

Claims 28-40 (Canceled)

41. (Original) A fire suppression and indication system for use in an aircraft, the aircraft having a cockpit, a control panel in the cockpit, and a storage area, the system comprising:

a plurality of containers in the storage area, wherein each container includes a base and a cover having an opening;

a fire suppression device located inside each of the containers, the fire suppression device comprising

a vessel;

a fire suppressant material inside the vessel;

a discharge tube attached to the vessel;

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

Pl
cont.

a fire detection system that detects a fire condition and activates the discharge of fire suppression material through the discharge tube; and

a transmitter that emits a first signal through the opening when the fire detection system releases the fire suppressant material.

42. (Original) A system according to claim 41, further comprising a receiver located above each of the containers, each of the receivers being configured to detect the first signal and provide a second signal to the control panel of the aircraft indicating the release of the fire suppressant material.

43. (Previously Presented) A system for detecting and suppressing a fire condition in a storage unit in a storage area, the system comprising:

a transmitter associated with the storage unit and configured to transmit a first signal upon detection of the fire condition, wherein the first signal is an infrared signal;

at least one receiver configured to detect the first signal and configured to provide a second signal indicating detection of the fire condition; and

a fire suppression device configured to discharge a fire suppressant material into the storage unit upon detection of the fire condition.

44. (Previously Presented) A system according to claim 43, wherein there are a plurality of storage units, a plurality of transmitters, and a plurality of receivers, and wherein an individual transmitter and an individual receiver are associated with each of the plurality of storage units.

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

bl
cont.

45. (Previously Presented) A system according to claim 44, wherein each of the storage units is located at a predetermined position relative to the individual receiver associated with the storage unit.

46. (Previously Presented) A system according to claim 45, wherein the second signal from a receiver is provided to a control panel that in response to the second signal identifies the storage unit experiencing the fire condition.

47. (Previously Presented) A system according to claim 44, wherein at least some of the storage units are containers.

48. (Previously Presented) A system according to claim 44, wherein at least some of the storage units are pallets including blankets for storing freight.

49. (Previously Presented) A system according to claim 43, wherein the fire suppression device comprises a pressurized vessel located within the storage unit, the vessel containing the fire suppressant material within the vessel; and

a fire detection component that activates the discharge of the fire suppressant material into the storage unit upon detection of a fire condition.

50. (Previously Presented) A system according to claim 43, wherein the transmitter includes a bimetallic switch configured to close upon detection of the fire condition.

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

B1
cont.

51. (Previously Presented) A system according to claim 44, where the fire suppression device includes a source of pressurized fire suppressant material and a popup device disposed between one of the storage units and the source, the popup device being configured to apply the fire suppressant material to the storage unit upon detection of the fire condition.

52. (Currently Amended) A fire suppression and indication system for use in an aircraft, the aircraft having a cockpit, a control panel in the cockpit, and a storage area, the system comprising:

a plurality of storage units for storing freight, the storage units being located at predetermined positions in the storage area;

a transmitter associated with each storage unit and configured to transmit a first signal upon detection of [[the]] a fire condition, wherein the first signal is an infrared signal;

at least one receiver configured to detect the first signal and configured to provide a second signal ^{to the cockpit} indicating detection of the fire condition; and

a fire suppression device configured to discharge a fire suppressant material into the storage unit upon detection of the fire condition.

53. (Currently Amended) A system according to claim ~~[[51]]~~ 52, wherein the fire suppression device includes a source of pressurized fire suppressant material and an application mechanism associated with one of the predetermined positions, the application mechanism ~~[[is]]~~ being arranged between one of the storage units and the

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

Pl
cont.

source and configured to apply the fire suppression device to the storage unit upon detection of the fire condition.

54. (Currently Amended) A system according to claim [[52]] 53, wherein at least one of the storage [[unit]] units is a container with a base including a hole, and wherein the application mechanism includes a valve aligned with the hole, such that the fire suppressant material is discharged into the container through the hole in the base.

55. (Currently Amended) A system according to claim [[51]] 52, wherein the storage unit is a pallet including a fire resistant blanket, and wherein the fire suppression device is arranged below the fire resistant blanket.

56. (Currently Amended) A system according to claim [[51]] 52, further comprising a control unit configured to receive the second signal, wherein [[and]] the control unit is configured to determine the origin of the first signal based on the second signal.

57. (Currently Amended) A system according to claim [[55]] 56, wherein the control unit transmits a third signal to a control panel indicating the origin of the first signal.

FINNEGAN
HENDERSON
FARABOW
GARRETT &
DUNNER LLP

1300 I Street, NW
Washington, DC 20005
202.408.4000
Fax 202.408.4400
www.finnegan.com

pd
confd.

58. (Currently Amended) A system according to claim ~~[[56]]~~ 57, wherein the control unit transmits a fourth signal to the fire suppression device to discharge the fire suppressant material into the container.